

標準電源
Standard power supply

1 φ 100V 50/60Hz 3 φ 200V 50/60Hz

最高使用圧力 (サージ圧力を含む)
Max. working pressure (including surge pressure)

0.98MPaG


MODEL	A	B	C	D	E	F	質量 Mass (kg)	ACファン入力 AC FAN input	
								1φ100V	3φ200V
ADC-187-11K	219	177	96	187	149	38	1.7	36 / 31 W	16 / 17 W
ADC-217-12K	249	190		217	162			36 / 31 W	16 / 17 W
ADC-217-17K			255	113		227	55	2.6	43 / 40 W

単位 Unit : mm

※お問い合わせの際は電源もお知らせ下さい。例) ADC-187-11K 1 φ 100V 50Hz

※ For inquiries on RADIATOR TYPE HEAT EXCHANGER, please inform not only the model but also the power supply. ex.) ADC-187-11K 1 φ 100V 50Hz

性能グラフ PERFORMANCE	条件 Condition
	流体 : ISO VG32 相当 / 油入口温度 : 65°C / 空気入口温度 : 35°C Fluid : ISO VG32 equivalent. / Oil inlet temperature : 65°C / Air inlet temperature : 35°C

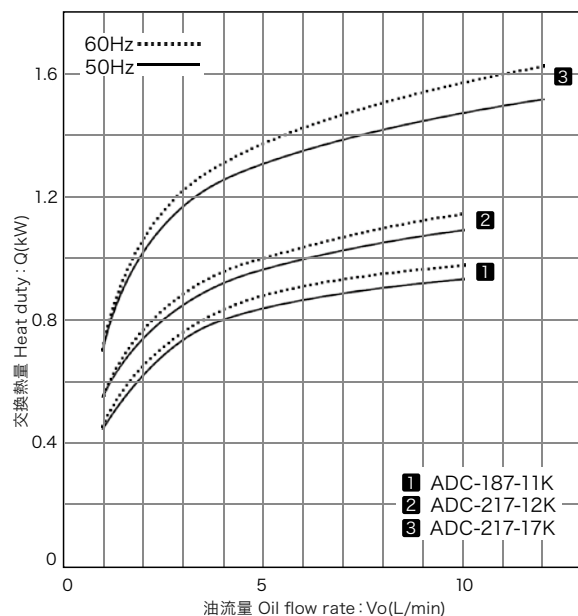

圧力損失グラフ PRESS. DROP	条件 Condition
	流体 : ISO VG32 相当 / 油温 : 50°C Fluid : ISO VG32 equivalent. / Oil temperature : 50°C

